




1. Names and Parts

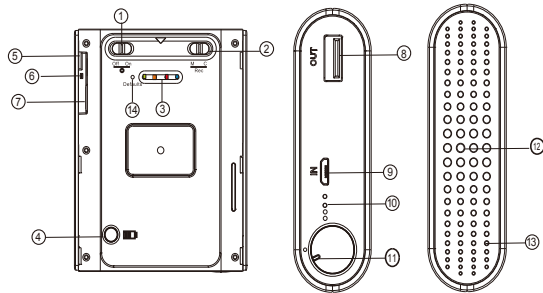

- | | |
|--|---|
| ① WiFi Switch | ⑥ DC 5V Out |
| ② Continuous Recording/ Motion Detection Switch | ⑦ Charge Port |
| ③ Status Indicators | ⑧ Battery Bar |
| ④ Battery Bar Button | ⑨ Power Switch (Clockwise: On, Counterclockwise: Off) |
| ⑤ USB Port (Retrieve Video Files) | ⑩ Lens |
| ⑥ Reset Key | ⑪ Microphone |
| ⑦ Memory Card Slot | ⑫ Default Button |

1

2. Package Content

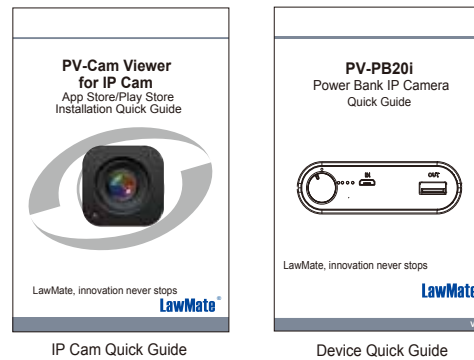

*No microphones are available for USA market.

2

3. Recording Operation

It is highly recommended to format memory card first before using it for the first time.

- 3.1. Power on: Switch ⑨ to clockwise direction.
- 3.2. Recording: 40 seconds after the device is powered on, it starts to record automatically.
- 3.3. Wi-Fi: With device powered on, switch ① to on, Wi-Fi will be turned on in 40 seconds.
- 3.4. Power off: Switch ⑨ to counterclockwise direction, you can stop the recording and turn off the DVR.
- 3.5. Restore default Wi-Fi password: long press ⑫ for 4 seconds.
- 3.6. Restore all default setting: press ⑫ for 10 seconds.
- 3.7. Change the recording mode: Switch ② right to Continuous recording mode; switch ② left to Motion Detection mode.

4. Status Indicators


- Solid blue LED ■ - power on
- Solid red LED ■ - recording on
- Blinking orange LED ■ - device searching for Wi-Fi connection
- Solid orange LED ■ - device connected to phone (P2P connected)
- Solid green LED ■ - device connected to the router (IP connected)

5. Format Memory Card

Go to the Program Setting on the PV Cam Viewer App to format the memory card.

3

6. Open the cover

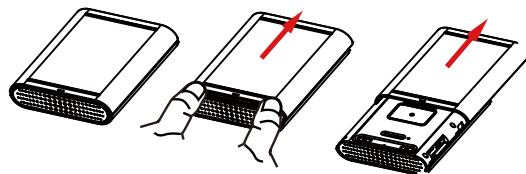

With the lens facing you, push the cover in red arrow direction.
The cover will then be opened.

7. Retrieve Video Files

There are two ways to read the retrieve video files.

- 6.1. Use memory card reader to retrieve video files.
- 6.2. With the device powered on and memory card inserted, plug the USB cable into ⑤, and plug the other end into the PC. The device will be recognized by PC as an external drive for user to retrieve the files.

8. Setting up IP Connection

Please refer to PV-Cam Viewer for IP cam quick guide.


4

9. Battery Bar Indicator

| LED Indicators | Battery Capacity |
|-------------------------|------------------|
| Three blue LED shining | 65~100% |
| Two blue LED shining | 35~ 65% |
| One blue LED shining | 5% ~ 35% |
| One Blinking blue LED | No power |
| Three flashing blue LED | Device charging |

- * Do not remove serial number stickers!
Warranty is invalid if the sticker is tampered!
- * This product is for Law Enforcement and Home Security Use Only!

PV-PB20i Power Bank IP Camera Quick Guide

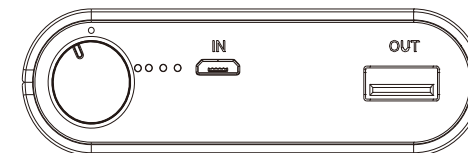

LawMate, innovation never stops

LawMate[®]

V1.2

5