



1. Names and Parts

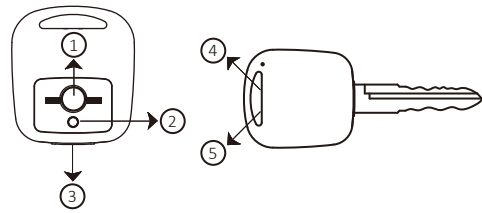

1. Power On / Off
2. Reset Button
3. USB / Charge Port
4. Charge LED (Green)
5. Power On LED (Blue)


2. Package Content

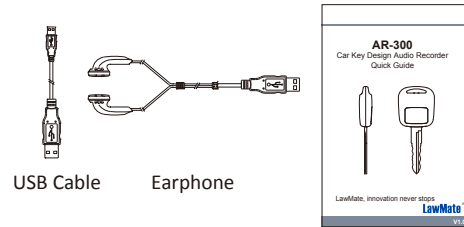

※ Do not remove serial number sticker! Warranty is invalid if the sticker is tampered.

1

3. Charging the Battery

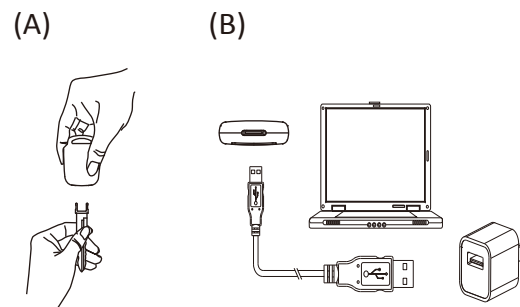

1. Pull the key blade (the USB cover) out of AR-300 as shown in illustration (A).
2. With the AR-300 powered off, connect the supplied USB cable to the USB port on the bottom of the device as shown in illustration (B).
3. Connect the other end of the USB cable to a computer, power bank or other USB power source as shown in illustration (B).
4. The green LED turns on during charging.
5. To fully charge the battery, it takes about 30 minutes. When fully charged, the green LED goes off.

2

4. Continuous Recording

1. Press and hold the Power On button ① for 3 seconds. The blue LED blinks 3 times and goes off, then the device starts recording automatically.
2. To stop recording, simply press and hold button ① for 3 seconds. The blue LED blinks 5 times and goes off, then the device is powered off.
3. To check if the device is recording, press button ① and see if the blue LED blinks 1 time and goes off.


5. Date and Time Setting

1. Right-click on Windows desktop. Choose Notepad to create a **set time.txt** file, then double-click the text file.
2. Suppose current time is April 11, 2018 15:00. Enter date and time information as 2018.04.11 15:00:00.
※ Note: A space must be present in between date and hour, and time must be in 24-hour format.
3. Save file name as set time.txt to the root directory of the device.
※ Note: A space must be present in between the word set and time.
※ Note: When the information is successful set to the device, the set time.txt file should not be visible when you connect the device to the computer again.

3

6. Playback Recordings

1. To playback the recorded files, you can connect the supplied earphone via USB port as shown in illustration (A), (B) or connect to a PC.
2. Long press the power button ①, the audio recording will be played at default volume (C).
3. To forward or backward, short press button ⑥ to skip to next track and ⑦ to previous track (C).

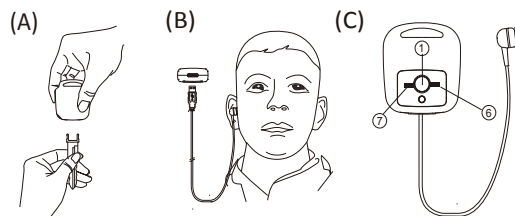

7. Blue LED Indicator

1. Blinks 3 times and goes off ■ - Recording.
2. Blue LED blinking slowly ■ - Playing Back.
3. Blue LED blinking fast for 10 seconds ■ - Low Battery.
4. Blue LED blinking fast for 3 minutes ■ - Memory Full.

4

8. Reset the Device

If your device functions abnormally, please reset it by pressing ② while the power is on. The device will restart when the reset is completed.


9. Specification

Audio Spec.	
File Format	MP3 (WAV)
Storage & I/O	
Memory Type	Built-in storage 4GB
Data Interface	MICRO USB 2.0
Audio Output	MICRO USB Audio output Jack
Power	
Power Input	USB 5V
Power Consumption	10mA-15mA
Battery Input	DC 3.7V / 110 mA high polymers battery
Charging Current	250mA
Charging Time	30min
Battery Lifetime	Continuous recording 7 Hour
Maximum Recording Time	18 hours (4GB)

※ This product is for Law Enforcement and Home Security use only!

5

AR-300 Car Key Design Audio Recorder Quick Guide

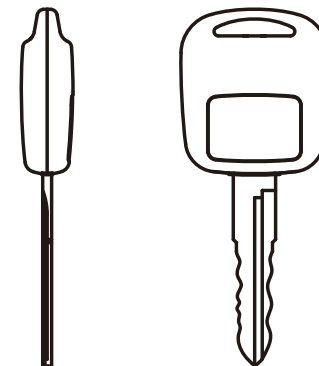

LawMate, innovation never stops

LawMate®

V1.5